


"OPT" ELECTRICIANS TOOLS - Taiwan

NO. S 27-85 "OPT" HYDRAULIC CUTTER HEAD

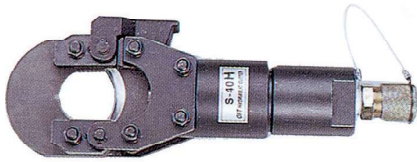

S-40H Head Only
(w/o H-B Hand Pump)

Item No.	Model No.	Specification	Output (Tons)	Length (mm)	Weight (kg)	Price (pc)
027-85-S40H	S-40H	Hand Hydraulic Cutter <i>Application:</i> Copper/Aluminium Cable & Wire Rope Cutting • Wire Rope (Hemp Core) 6x7 : 20mm • Wire Rope (Hemp Core) 6x12 / 6x19 : 25mm • Round Bar - Soft Copper : 25mm • Round Bar - Soft Alum. : 22mm • Round Bar - Soft Steel : 16mm • Bare Stranded Wire - Copper / Alum. : 32mm • Telephone Cable (CCP) - Copper/Alum: 40mm • Lead Sheathed Cable : 40mm • Armored Underground Cable : 40mm	8	247	2.8	
**Warning: DO NOT cut any Rebar, ACSR or Big Strand						

NO. S 27-86 "OPT" HYDRAULIC HAND PUMP H-B



H-B

Item No.	Model No.	Capacity	Weight (kg)	Price (pc)
027-86-HB	H-B	Hydraulic Hand Pump Maximun Pressure : 1st Stage 20 kg/cm ² Output Per Stroke : 1st Stage 13 cc Reservoir Capacity : 700 cc Oil Port Thread : 3/8 NPT Speed DWND : Two Length of Hose : 1.8 m Size : 600(L) x 150(W) x 150(H)mm	10.5 2nd Stage 700 kg/cm ² 2nd Stage 2.8 cc	

NO. S 27-87 "OPT" HYDRAULIC PUNCH DRIVER



MAP-9



MAP-10

Item No.	Model No.	Capacity	Weight (kg)	Price (set)
027-87-MAP09	MAP-9	Hydraulic Punch Driver • Output 8 Tons • Plate Thickness - Stainless Steel 1.6mm - Mild Steel 3.2mm • Hole Diameter 21.8mm (1/2") to 60.5mm (2") • Ram Stroke 20mm • Oil Capacity 40cc • Punch Set for Thickwall Conduit - 10 sets 6 Dies : 1/2"Ø (21.8mm), 3/4"Ø (27.6mm), 1"Ø (34.1mm) 1-1/4"Ø (42.7mm), 1-1/2"Ø (48.7mm), 2"Ø (60.5mm) 2 Screws: 3/8"Ø & 3/4"Ø 3 Spacers: AD20, AD34 & AD44	9.2	
027-87-MAP10	MAP-10	Hydraulic Punch Driver For Punching Into Switchboard Control Panels and Others • Output 12 Tons • Plate Thickness - Stainless Steel 1.6mm - Mild Steel 3.2mm • Hole Diameter 21.8mm (1/2") to 115.5mm (4") • Ram Stroke 25mm • Oil Capacity 40cc • Punch Set for Thickwall Conduit - 10 sets 10 Dies : 1/2"Ø (21.8mm), 3/4"Ø (27.6mm), 1"Ø (34.1mm) 1-1/4"Ø (42.7mm), 1-1/2"Ø (48.7mm), 2"Ø (60.5mm) 2-1/2"Ø (76.1mm), 3"Ø (88.9mm), 3-1/2"Ø (102.8mm), 4"Ø (115.5mm) 3 Screws: 3/8"Ø, 3/4"Ø & 1"Ø 3 Spacers: AD20, AD34 & AD44	34	