

# "ISHII" TILE CUTTING TOOLS - Japan



## NO. S 70-6 "ISHII" SMART ACE TILE CUTTER NO. SWX-840A

This machine comes with special hard heated solid steel rails with hard chrome plated finish. Metallic blue new aluminum die casting curved handle with big cushion grip with wheel storage. 10mm thick heavy duty base rubber pad. 120mm wide 2 faced padded zinc alloy breaker foot. 22XA new upgraded special hard alumina coated tungsten carbide cutting wheel with bearings.

### SWX-840A

c/w No. 22XA special hard alumina coated tungsten carbide rotary bearing wheel

Item No.	Cutting Capacity		Packing (sets) Box / Ctn	Wt (kg) per ctn	Price (set)
	Length (mm)	Thickness (mm)			
070-06-SWX840A	840	2 ~ 21	1 2	23	



## NO. S 70-7 "ISHII" MONORAIL TECH TURBO TILE CUTTER NO. JTM-650S / JTM-720S


Long aluminum alloy made curved cushion grip handle with wheel storage. 2 levels cutting wheel height adjustable function. Stronger aluminum die casting top wide base, top padded spring base plate and thick heavy duty base rubber pads. 150mm wide padded strong zinc alloy made breaker foot. 22XA new upgraded special hard alumina coated tungsten carbide cutting wheel with bearings.

**JTM-650S** (To replace old model *JH-650SA*)

**JTM-720S** (To replace old model *JH-720SA*)

c/w No. 22X titanium coated tungsten carbide rotary bearing wheel, red painted body

Item No.	Cutting Capacity		Packing (sets) Box / Ctn	Wt (kg) per ctn	Price (set)
	Length (mm)	Thickness (mm)			
070-07-JTM650S	650	3 ~ 21	1 2	24.5	
070-07-JTM720S	720	3 ~ 21	1 2	27.5	

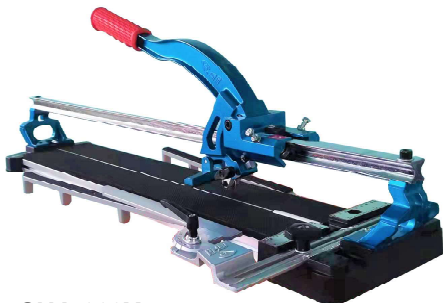

## NO. S 70-7 "ISHII" SMART JET TURBO TILE CUTTER NO. SHA-660X / SHA-840X

This machine comes with regular curved handle grip, chrome plated H shaped rail, top and bottom die cast base with aluminum extruded base connection. 10mm thickness heavy duty rubber pads on the base. 400mm long aluminum side extension arms, 22X titanium coated bearing cutting wheel.

SPA-660X : 90mm wide zinc breaker foot and 200mm wide protractor gauge.

SPA-840X : 120mm wide zinc breaker foot and 300mm wide protractor gauge.

### SHA-660X SHA-840X

c/w No. 22X titanium coated tungsten carbide rotary bearing wheel,

Item No.	Cutting Capacity		Packing (sets) Box / Ctn	Wt (kg) per ctn	Price (set)
	Length (mm)	Thickness (mm)			
070-07-SHA660X	660	2 ~ 16	1 2	16.5	
070-07-SHA840X	840	2 ~ 16	1 2	17.5	



## NO. S 70-8 "ISHII" MAX PREMIUM TECH TURBO TILE CUTTER NO. ATM-870S / ATM-1040S / ATM-1240S

Long aluminum alloy made curved cushion grip handle with wheel storage. 2 levels cutting wheel height adjustable function. Stronger aluminum die casting top wide base, top padded spring base plate and thick heavy duty base rubber pads. 150mm wide padded strong zinc alloy made breaker foot. 22XA new upgraded special hard alumina coated tungsten carbide cutting wheel with bearings.

**ATM-870S** (To replace old model *AH-870S*)

**ATM-1040S** (To replace old model *AH-1040S*)

**ATM-1240S** (To replace old model *AH-1240S*)

c/w No. 22X titanium coated tungsten carbide rotary bearing wheel

Item No.	Cutting Capacity		Packing (sets) Box / Ctn	Wt (kg) per ctn	Price (set)
	Length (mm)	Thickness (mm)			
070-08-ATM0870S	870	3 ~ 21	1 1	17.7	
070-08-ATM1040S	1040	3 ~ 21	1 1	20.5	
070-08-ATM1240S	1240	3 ~ 21	1 1	22.3	