


"FUJI TOOL" GAUGE - Japan

NO. S 82-21 "FUJI TOOL" SCREW & PIPE THREAD PITCH GAUGE

NPT & PT are Stainless Steel



Item No.	Model No.	No. of Blades	Angle	Range	Price (pc)
082-21-004	4	24	60°	Screw Pitch 4 to 30 per inch - UNC, UNF, UNS	
082-21-005	5	26	60°	Screw Pitch 32 to 82 per inch - UNC, UNF, UNS	
082-21-006	6	30	60°	Screw Pitch 4 to 42 per inch - UNC, UNF, UNS	
082-21-137	137	26	55°	Screw Pitch 4 to 60 per inch - BSW, BSF	
082-21-156	156	28	60°	Screw Pitch 0.25 to 2.5 mm	
082-21-160	160	24	60°	Screw Pitch 0.2 to 6.0 mm + 60°	
082-21-474	474	28	60°	Screw Pitch 4 to 80 per inch - UNC, UNF, UNS	
082-21-476	476	30	55°	Screw Pitch 3.5 to 60 per inch - BSW, BSF	
082-21-NPT	NPT	5	60°	Pipe Pitch 8, 11-1/2, 14, 18, 27 - NPT	
082-21-PT	PT	4	55°	Pipe Pitch 11, 14, 19, 28 - BSP	
082-21-SAE	SAE	34	60°	Screw Pitch 4 to 80 per inch - UNC, UNF, UNS	

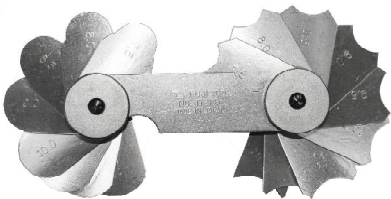

NO. S 82-22 "FUJI TOOL" RADIUS GAUGE

- To measure the convex and concave radii of works.
- Made of Stainless Steel.
- Accuracy ± 0.03mm (Range from Radii 0.1 ~ 3.0mm).
- Accuracy ± 0.05mm (Range from Radii 3.25 ~ 13mm).

178MA Both Convex & Concave
178MB Both Convex & Concave



272MA Convex only
272MB Convex only

Item No.	No. of Blades	Radii (mm)	Price (pc)
082-22-178MA	34	1.0 1.25 1.5 1.75 2.0 2.25 2.5 2.75 3.0 3.5 4.0 4.5 5.0 5.5 6.0 6.5 7.0	
082-22-178MB	32	7.5 8.0 8.5 9.0 9.5 10.0 10.5 11.0 11.5 12.0 12.5 13.0 13.5 14.0 14.5 15.0	
082-22-272MA	18	0.75 1.0 1.25 1.5 1.75 2.0 2.25 2.5 2.75 3.0 3.25 3.5 3.75 4.0 4.25 4.5 4.75 5.0	
082-22-272MB	16	5.5 6.0 6.5 7.0 7.5 8.0 8.5 9.0 9.5 10.0 10.5 11.0 11.5 12.0 12.5 13.0	
082-22-L300MX	26	0.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0 4.5 5.0 5.5 6.0 6.5 7.0 7.5 8.0 8.5 9.0 9.5 10.0 10.5 11.0 11.5 12.0 12.5 13.0	



L300MX

NO. S 82-23 "FUJI TOOL" ANGLE GAUGE

Made of high quality carbon steel. Used by inspectors, toolmakers, and die sinders for checking angles. Takes the place of a protractor. The angle edge and the two sides are ground.

18 leaves, each with a different angle, including 14-1/2° or 1/2 the Acme Standard (29°).



466

Item No.	Model No.	No. of Blades	Range	Blade Dimensions T x W x L	Price (pc)
082-23-466	466	18	1 ~ 45°	9/32" x 1-1/16" x 4-3/16"	